


铠装光纤跳线

铠装光纤跳线

坚韧耐用的铠装光纤跳线在护套内装有不锈钢套管，此设计可以对内部的光纤提供额外的保护。

此跳线具坚韧的光缆结构，适用于户外布线安装。且提供更高的抗压能力和对啮齿类动物的防护性能。

可根据客户指定的光缆长度和纤芯来定制，可以选配各种类型连接器，包括FC、SC、ST、LC和E2000。

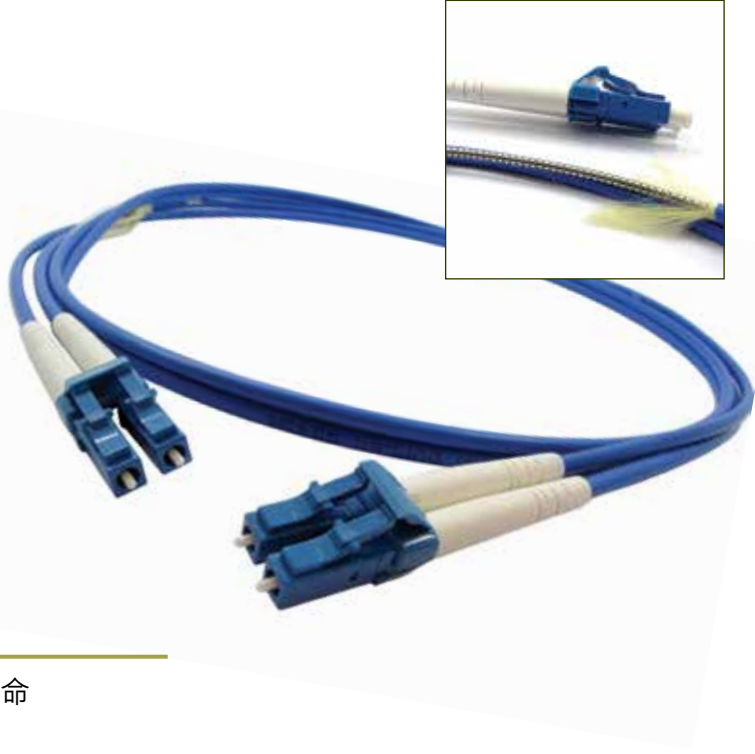

主要特点：


- ▣ 抗压能力强，因此提高其耐用性和使用寿命
- ▣ 坚韧的光缆结构能有效地防护啮齿类动物
- ▣ 具备良好的弯曲性能，便于安装
- ▣ 可选择各种连接器，包括FC、SC、ST、LC和E2000

规格

光缆结构		单芯铠装光缆，外径：3.0mm (+/- 0.15mm)
		双芯铠装光缆，外径：3.0 x 6.0mm (+/- 0.15mm)
连接器类型		FC、SC、ST、LC、MU、E2000
纤芯选项		单模 (OS1/2)
		多模 (OM1，OM2，OM3和OM4)
护套材料选项		Riser (OFNR)
		低烟无卤 (LSZH)
护套颜色选项	单模	OS1/2：蓝色
	多模	OM1，2，3：灰色；OM4：按需
光学性能	单模	IL ≤ 0.3dB (典型值0.1dB)
	@1310nm	RL ≥ 55dB (UPC)， ≥ 65dB (APC)
	多模	IL ≤ 0.3dB (典型值0.1dB)
	@850nm	RL ≥ 25dB
操作温度		- 20°C 至 + 60°C
最大拉力		300N (短期)
		150N (长期)
光纤衰减系数	单模	1310nm：0.4dB/km
		1550nm：0.25dB/km
	多模	850nm：3.0dB/km
		1300nm：1.0dB/km
最小弯曲半径		≥ 30D

铠装光纤跳线

单芯铠装跳线

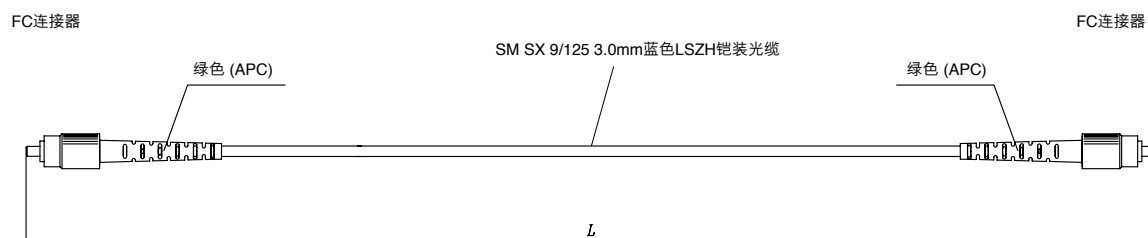

单芯铠装跳线示例—FC-FC，OS1/2，APC，LSZH，5m
产品编号：ARS11AS1L-005M

FC-FC单芯



物项描述		产品编号 ⁽¹⁾ 、 ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARS11AS1R-xxxM	ARS11AS1L-xxxM
OS1/2	UPC	ARS11US1R-xxxM	ARS11US1L-xxxM
OM1	PC	ARS11PM1R-xxxM	ARS11PM1L-xxxM
OM2	PC	ARS11PM2R-xxxM	ARS11PM2L-xxxM
OM3	PC	ARS11PM3R-xxxM	ARS11PM3L-xxxM
OM4	PC	ARS11PM4R-xxxM	ARS11PM4L-xxxM

ST-ST单芯



物项描述		产品编号 ⁽¹⁾ 、 ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARS22AS1R-xxxM	ARS22AS1L-xxxM
OS1/2	UPC	ARS22US1R-xxxM	ARS22US1L-xxxM
OM1	PC	ARS22PM1R-xxxM	ARS22PM1L-xxxM
OM2	PC	ARS22PM2R-xxxM	ARS22PM2L-xxxM
OM3	PC	ARS22PM3R-xxxM	ARS22PM3L-xxxM
OM4	PC	ARS22PM4R-xxxM	ARS22PM4L-xxxM

SC-SC单芯



物项描述		产品编号 ⁽¹⁾ 、 ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARS33AS1R-xxxM	ARS33AS1L-xxxM
OS1/2	UPC	ARS33US1R-xxxM	ARS33US1L-xxxM
OM1	PC	ARS33PM1R-xxxM	ARS33PM1L-xxxM
OM2	PC	ARS33PM2R-xxxM	ARS33PM2L-xxxM
OM3	PC	ARS33PM3R-xxxM	ARS33PM3L-xxxM
OM4	PC	ARS33PM4R-xxxM	ARS33PM4L-xxxM

(1) "xxx"即指光缆长度 (m)，请填写需要的长度 (3位数)

(2) 如果您需要在两端使用不同的连接器，请注明

铠装光纤跳线

铠装光纤跳线

单芯铠装跳线

LC-LC单芯



物项描述		产品编号 ⁽¹⁾ 、 ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARS44AS1R-xxxM	ARS44AS1L-xxxM
OS1/2	UPC	ARS44US1R-xxxM	ARS44US1L-xxxM
OM1	PC	ARS44PM1R-xxxM	ARS44PM1L-xxxM
OM2	PC	ARS44PM2R-xxxM	ARS44PM2L-xxxM
OM3	PC	ARS44PM3R-xxxM	ARS44PM3L-xxxM
OM4	PC	ARS44PM4R-xxxM	ARS44PM4L-xxxM


E2000-E2000单芯



物项描述		产品编号 ⁽¹⁾ 、 ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARS55AS1R-xxxM	ARS55AS1L-xxxM
OS1/2	UPC	ARS55US1R-xxxM	ARS55US1L-xxxM
OM1	PC	ARS55PM1R-xxxM	ARS55PM1L-xxxM
OM2	PC	ARS55PM2R-xxxM	ARS55PM2L-xxxM
OM3	PC	ARS55PM3R-xxxM	ARS55PM3L-xxxM
OM4	PC	ARS55PM4R-xxxM	ARS55PM4L-xxxM

(1) "xxx"即指光缆长度 (m)，请填写需要的长度 (3位数)
(2) 如果您需要在两端使用不同的连接器，请注明

双芯铠装跳线

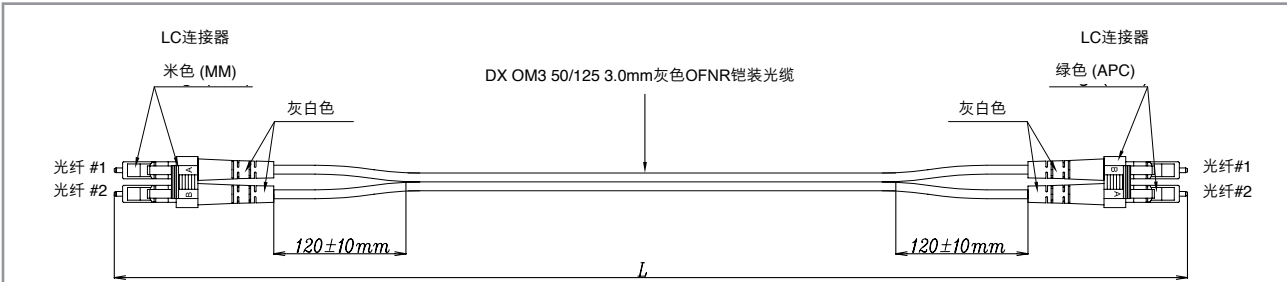

双芯铠装跳线示例—LC-LC，OM3，PC，OFNR，10m
产品编号：ARD44PM3R-010M

FC-FC双芯



物项描述		产品编号 ⁽¹⁾ 、 ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARD11AS1R-xxxM	ARD11AS1L-xxxM
OS1/2	UPC	ARD11US1R-xxxM	ARD11US1L-xxxM
OM1	PC	ARD11PM1R-xxxM	ARD11PM1L-xxxM
OM2	PC	ARD11PM2R-xxxM	ARD11PM2L-xxxM
OM3	PC	ARD11PM3R-xxxM	ARD11PM3L-xxxM
OM4	PC	ARD11PM4R-xxxM	ARD11PM4L-xxxM

(1) "xxx"即指光缆长度 (m)，请填写需要的长度 (3位数)
(2) 如果您需要在两端使用不同的连接器，请注明

铠装光纤跳线

ST-ST双芯



物项描述		产品编号 ⁽¹⁾ · ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARD22AS1R-xxxM	ARD22AS1L-xxxM
OS1/2	UPC	ARD22US1R-xxxM	ARD22US1L-xxxM
OM1	PC	ARD22PM1R-xxxM	ARD22PM1L-xxxM
OM2	PC	ARD22PM2R-xxxM	ARD22PM2L-xxxM
OM3	PC	ARD22PM3R-xxxM	ARD22PM3L-xxxM
OM4	PC	ARD22PM4R-xxxM	ARD22PM4L-xxxM

SC-SC双芯



物项描述		产品编号 ⁽¹⁾ · ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARD33AS1R-xxxM	ARD33AS1L-xxxM
OS1/2	UPC	ARD33US1R-xxxM	ARD33US1L-xxxM
OM1	PC	ARD33PM1R-xxxM	ARD33PM1L-xxxM
OM2	PC	ARD33PM2R-xxxM	ARD33PM2L-xxxM
OM3	PC	ARD33PM3R-xxxM	ARD33PM3L-xxxM
OM4	PC	ARD33PM4R-xxxM	ARD33PM4L-xxxM

LC-LC双芯



物项描述		产品编号 ⁽¹⁾ · ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARD44AS1R-xxxM	ARD44AS1L-xxxM
OS1/2	UPC	ARD44US1R-xxxM	ARD44US1L-xxxM
OM1	PC	ARD44PM1R-xxxM	ARD44PM1L-xxxM
OM2	PC	ARD44PM2R-xxxM	ARD44PM2L-xxxM
OM3	PC	ARD44PM3R-xxxM	ARD44PM3L-xxxM
OM4	PC	ARD44PM4R-xxxM	ARD44PM4L-xxxM

E2000-E2000双芯



物项描述		产品编号 ⁽¹⁾ · ⁽²⁾	
纤芯	端面研磨	护套材料	
		OFNR护套	LSZH护套
OS1/2	APC (8度)	ARD55AS1R-xxxM	ARD55AS1L-xxxM
OS1/2	UPC	ARD55US1R-xxxM	ARD55US1L-xxxM
OM1	PC	ARD55PM1R-xxxM	ARD55PM1L-xxxM
OM2	PC	ARD55PM2R-xxxM	ARD55PM2L-xxxM
OM3	PC	ARD55PM3R-xxxM	ARD55PM3L-xxxM
OM4	PC	ARD55PM4R-xxxM	ARD55PM4L-xxxM

(1) "xxx"即指光缆长度 (m)，请填写需要的长度 (3位数)

(2) 如果您需要在两端使用不同的连接器，请注明